

# Installation Guide - FilterShield™1500



- 1 FilterShield™1500 Unit:** Ensure that there is sufficient clearance in-front of the unit so the draw can be pulled out fully (15.7"/400mm minimum).
- 2 Inlet Pipe – 1½"/40mm:** To be piped with a sufficient fall of no less than 1 in 40.
- 3 Outlet Pipe – 2"/54mm:** To be piped with a sufficient fall of no less than 1 in 40.
- 4 FilterShield™1500 Drawer:** The Drawer on the FS1500 must be fully closed during normal operation and should only be opened for cleaning and daily maintenance.
- 5 FilterShield™1500 Basket:** A FS1500 basket must be installed into the unit at all times, ensure there is sufficient clearance for basket removal when the draw is pulled out fully.
- 6 FilterShield™1500 Service Cover:** The FS1500 Service Cover must be screwed in place during normal operation, and only removed for maintenance purposes.
- 7 Running Trap:** The outlet of unit must be fitted with a running trap to reduce foul smells.
- 8 Interconnecting Pipework:** All pipework must be clipped and properly supported.
- 9 Spray Gun Attachment:** The FS1500 comes with a Spray Gun (Optional Extra) attachment which can be positioned on either side of the unit depending on the proximity to the hot water supply.
- 10 Stainless Steel Hygiene Stand:** FS1500 unit is provided with a Stainless Steel Hygiene stand. It can be adjusted up to 5.3"/135mm in height to allow the unit to be raised up and levelled on uneven surfaces and provide access for cleaning.



Environmental  
Products and Services Ltd

Award Winning Technology


V3 12/05/2020

Web: [www.aquamundus.com](http://www.aquamundus.com)  
Phone number 0138 6832205  
Email: [services@aquamundus.co.uk](mailto:services@aquamundus.co.uk)

# Installation Guide - FilterShield™1500



FS1500 Front View

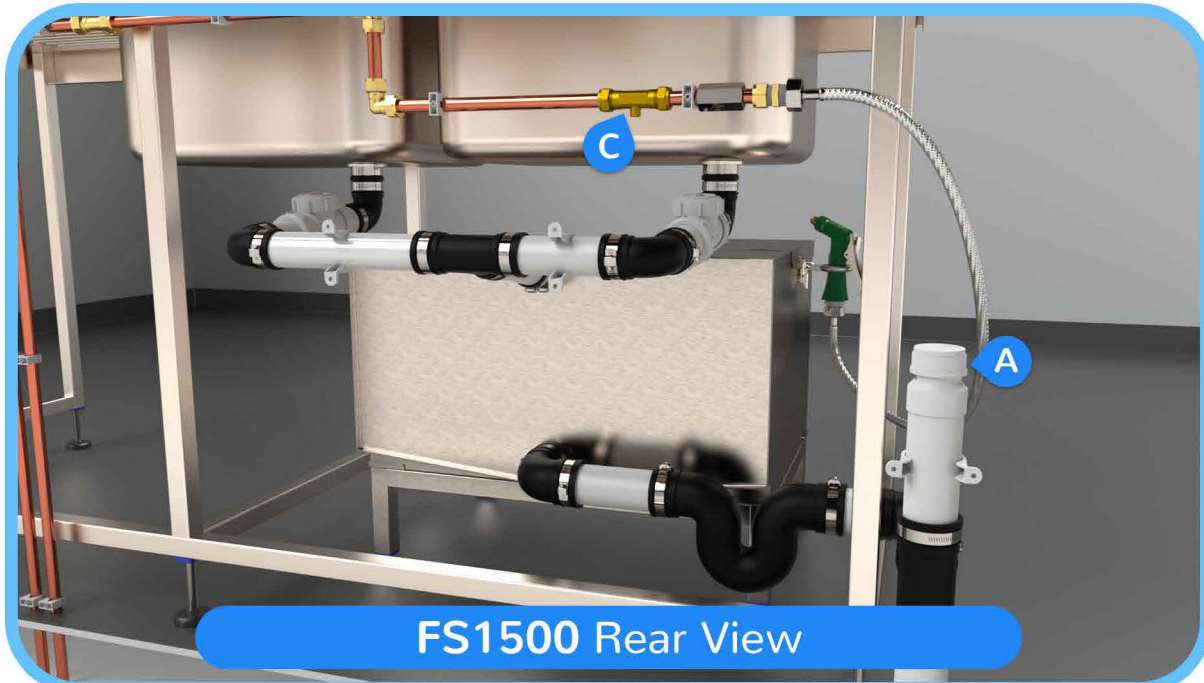

FS1500 Rear View

- Make sure the FS1500 is installed on level ground or adjust the stand feet to ensure the unit is level.
- Make sure there is enough space in-front of the FS1500 to pull the drawer out fully and remove the filter basket.
- Ensure all pipe work into and out of the unit has at least a 1 in 40 fall (downwards angle of 1.5°).
- Empty out the FS1500 basket on a regular basis and clean the basket daily.
- Have a spare basket available as a replacement during emptying and cleaning.
- Make sure the Lid of the FS1500 is screwed securely in place during normal operation.
- An Air Admittance Valve **A** must be installed after the running trap so a siphon doesn't occur.
- If a Spray Gun is installed with the unit, then water connection must be made via a WRAS approved isolation valve **B** and double check valve **C**.



**DO**



**DON'T**

- Place the unit in passageways where it can be a hazard or be damaged.
- Open the unit or insert hands into any part of the unit; moving parts can cause injury.
- Stand or place heavy objects on top of the unit.
- Dismantle the unit in any way, only qualified service staff are to access the inside of the unit.



Environmental  
Products and Services Ltd

Award Winning Technology

V3 12/05/2020

Web: [www.aquamundus.com](http://www.aquamundus.com)  
Phone number 0138 6832205  
Email: [services@aquamundus.co.uk](mailto:services@aquamundus.co.uk)