

Technical Specification - GreaseShield® 1000 AST



GreaseShield®

**AUTOMATED
SOLIDS TRANSFER
FOR SOLID WASTE
SEPARATION**

APPLICATIONS

- Prep Sinks
- Small Pot Wash Sinks

FLOW RATES & CERTIFICATION

- Pro-Active Flow Rate - 1 L/sec
- ASME Certification
- PDI Certification
- CSA Certification
- EN 1825 Certification

STANDARD FEATURES & FUNCTIONS

- Automatic FOG & solids removal
- Self cleaning
- Magnetic baffle for bioremediation
- PLC controlled
- Reverse flow configuration
- Space Saver Running Trap & Sampling Point
- Globally certified award winning technology
- The only Green Certified grease trap in the world

Plumbing Connections

Inlet	1 1/4"/34mm
Outlet	2"/50mm
Hot Water Solenoid	3/4"/22m

Electrical Ratings

	USA	UK,EU,AU,NZ
Voltage	120v	230v
Frequency	60Hz	50Hz
Current	1.5A	0.75A

Standard Operational Times

Days of Operation	7 Days a Week
Hours of Operation	07:00-02:30

Note: Operational times should be adjusted to suit the needs of the kitchen

Average Power Consumption

39.1W Per Hour


CERTIFICATIONS & APPROVALS

- Global GreenTag LCA Rate Gold Certification
- PDI G101 (Plumbing & Drainage Institute)
- ASME A112.14.3 & A112.14.4 (American Society of Mechanical Engineers)
- NSF International (National Sanitation Foundation)
- CSA (Canadian Standards Association) - Grease Interceptors
- UL (Underwriters Laboratory)
- IAPMO (International Association of Plumbing and Mechanical Officials) Uniform Plumbing Code Certification Mark
- CE - Conformity with Health, Safety and Environmental Protection \ Standards with the European Economic Area (EEA)
- EN1825 (European Standard for Grease Separators)
- KIWA (ETA DK, Swedac & SINTEF) - Sweden, Norway and Finland. European Institution for Testing, Inspection and Certification

V5 24/04/2020

Technical Specification - GreaseShield®1000 AST

GreaseShield®

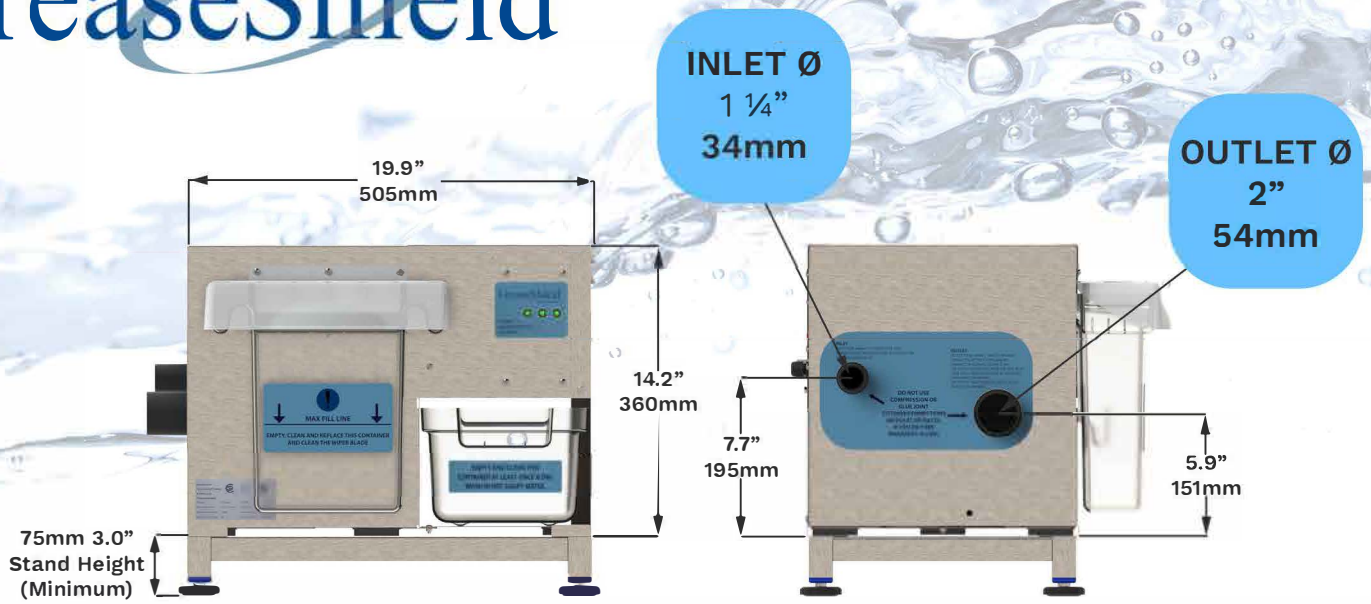

SPACE REQUIRED FOR SOLIDS CONTAINER REMOVAL



V5 24/04/2020