

STAINLESS STEEL FILTERED
GREASE TRAPS

STAINLESS STEEL FILTERED
GREASE TRAPS

environmentally friendly
kitchen filtration systems

Contacts

Aqua Mundus SSGT stainless steel grease traps incorporating the patented FreshMesh filter system are available online at www.aquamundus.co.uk

For technical information and sales support, please contact:

Aqua Mundus
20 Bond Industrial Estate
Wickhamford
Worcestershire
WR11 7RL

telephone:
01386 832205

email
support@aquamundus.co.uk

web:
www.aquamundus.co.uk

*10 year return to base warranty.
If it's our fault, we'll fix it. We will replace a faulty unit by return on receipt of the grease trap and proof of purchase, subject to appropriate application, installation by a qualified plumber and proper maintenance.
This excludes the neoprene lid seal.

FRESHMESH® stainless steel filtered grease trap patent No. GB 2305617

E & OE.

Protect your pipes and drains from blockage using the unique FRESHMESH® patented filter system.

High efficiency filter protection complies with all Water Authority Standards to date.

Significant advantages in fitting, performance and cost over cast iron and other stainless steel alternatives.

Designed for quick inspection and easy cleaning when required.

10 Year Warranty



environmentally friendly
kitchen filtration systems

THIS GUIDE COVERS

- ▲ Product Specification
- ▲ Applications
- ▲ Technical reference information
- ▲ Model range and selection
- ▲ Installation & Maintenance
- ▲ Contact details

www.aquamundus.co.uk


Waste water containing solids, grease and fat can cause severe drainage problems. The unique stainless steel filtered grease traps are designed to filter out solid waste efficiently, keeping drains cleaner. This prevents disruption of work due to blocked drains and ensures compliance with local Water Authority regulations

SSGT Range and Selection

Our SSGT stainless steel filtered grease traps come in a range of sizes to suit all applications and work areas. When using the chart to determine the best model for you, choose the largest that will fit whilst leaving 100mm all round to allow for unclipping the lid. Please allow height **K** for removal of the filter cassette.

Specifications

- ▲ Internal or external use (*above ground*).
- ▲ Through flow unit, so serves any sink volume if recommended installation and cleaning procedures are followed.
- ▲ High quality type 304 stainless steel.
- ▲ All seams fully welded.
- ▲ Connection using Multifit connectors.
- ▲ Quick release watertight lid for simple inspection and cleaning.
- ▲ Integrated access for grease reliquifier (*if specified*).
- ▲ Full maintenance instructions supplied with the unit for use by kitchen and works staff.
- ▲ 10 year return to base warranty*.

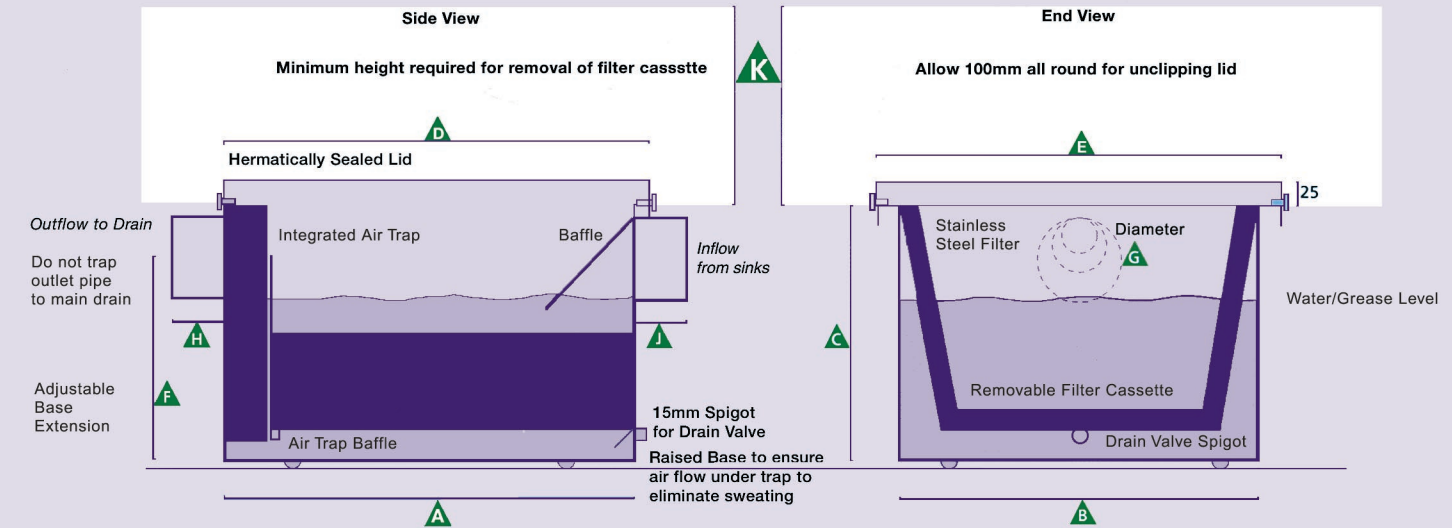

Applications

- ▲ **Commercial**
Bistro, Bakery, Cafe, Hotel, Nursing Home, Restaurant, Social Club, Takeaway, Works Canteen, etc.
- ▲ **Domestic**
B&B, Guest House.
- ▲ **Industrial**
Factories, Food Packing, Food Processing, Industrial Units, Workshops.

Benefits of Stainless Steel Grease Traps over Cast Iron

- ▲ **Lightweight** - no jacks or trolleys required, easy carry up stairs.
- ▲ **Easy to fit** - no welding, uses standard fittings, fit in minutes by any qualified plumber.
- ▲ **Efficient** - complies with all current Water Authority regulations.
- ▲ **Easy to clean** - quick release clips, lift-out filter basket.
- ▲ **Lower Cost** - the best costs less.
- ▲ **Investment value** - easy to resite as you grow or if you move.
- ▲ **Next day UK mainland delivery**, 3 days Islands and Northern Ireland.

Benefits over other Stainless Steel Grease Traps

- ▲ **Easy to fit** - Multifit connections.
- ▲ **No welding** - supplied ready to fit
- ▲ **Adjustable mounting brackets** - on most models
- ▲ **Efficient** - patented FRESHMESH® filtration system
- ▲ **Easy to clean** - quick release lid for inspection and cleaning.

Diagram Measurement

	A	B	C	D	E	F	G	H	J	K
SSGT1	150	150	150	225	150	120	40	35	35	150
SSGT2	350	330	200	375	350	163-330	50	45	65	200
SSGT4	500	400	200	525	450	163-330	50	45	65	200
SSGT6	500	400	300	525	450	233-400	50/110	45	65	300
SSGT8	500	400	400	525	450	333-500	50/110	45	65	400
SSGT12	750	400	400	775	450	333	110	70	70	400
SSGT16	1000	400	400	1025	450	333	110	70	70	400
SSGT20	1200	400	400	1225	450	333	110	70	70	400

Application

	Domestic Kitchen / Coffee Machine	Takeaway	Dishwasher	Small Kitchen 10-50 Covers	Medium Kitchen 51-100 Covers	Large Kitchen 101-150 Covers	Extra Large Kitchen 151+ Covers
SSGT1	✓						
SSGT2	✓	✓		✓			
SSGT4		✓		✓			
SSGT6		✓		✓	✓		
SSGT8		✓	✓	✓	✓		
SSGT12			✓	✓	✓	✓	✓
SSGT16			✓	✓	✓	✓	✓
SSGT20			✓	✓	✓	✓	✓

Installation

SSGT stainless steel filtered grease traps come fully assembled and ready to fit by a qualified plumber. If fitting into an existing system, check first that drain pipes on the outlet side have been cleaned. Set stainless steel brackets (*supplied*) to the required inlet/outlet height. Connect to inlet and outlet using standard Multifit connectors (*not supplied*). The low level 15mm pipe must be connected to the main drain with a shut off valve (*not supplied*). This will aid the deep cleaning operation. Once fitted, return the warranty card supplied with the unit to activate customer support and 10 year manufactures warranty.

Stainless steel filtered grease traps are designed to be compatible with the drain dosing systems for the timed injection of multi strain biological grease digesting liquid into the grease traps. Please ask for details and installation instructions. (Adjustable mounting feet not available on the SSGT1, SSGT12, SSGT16, SSGT20 Models)

STAINLESS STEEL FILTERED
GREASE TRAPS